

# miniDaT WEB Basic LTE






## Usage time, Theft protection, Position

- Monitoring of work and rest area
- Switching on and off possible via the Obserwando portal
- Tested on construction sites and insensitive to dust, water, heat or vibration
- Daily transmission of usage times (date and time) to the Obserwando portal\*
- Easy evidence of weekend use or multi-shift use
- Easy proof of incorrect operation
- Current machine position available at all times

**Easy to construct. Easy to use.**

\* If mobile phone coverage is available.

## Areas of application:

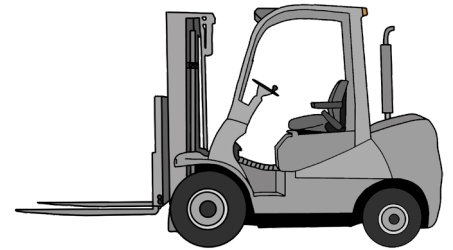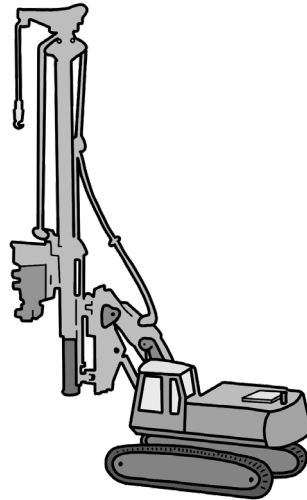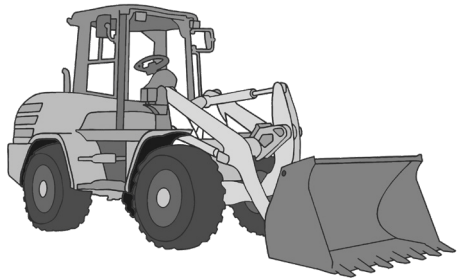

## Truly simple:

- Data acquisition of 3 functions, e.g. machine running time, battery charge, lack of oil
- Machine position monitoring
- Waterproof, shakeproof
- Daily transfer of operating data to Obserwando
- Alarm to any number of users
- Easy installation
- Calculable costs through annual flat rate

## Technical Data:

**Operating voltage:** Supply via vehicle battery 10VDC - 60VDC

**Protection:** IP66

**Temperature range:** -20°C - +70°C

**Housing dimensions:** 122 x 57 mm (diameter x height)

**Do you have any questions?**

**Call us, we are happy to help.**



Rösler Software-Technik GmbH, +49 (0) 421 80 22 70 0, email: [info@miniDaT.de](mailto:info@miniDaT.de),  
[www.minidat.de](http://www.minidat.de), [www.obserwando.de](http://www.obserwando.de)