






EQTrace click

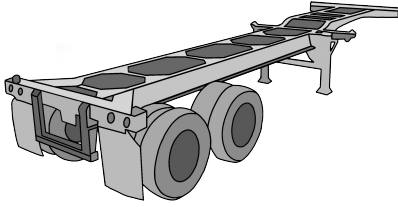

Chassis
Container
Material
Vibratory Plates

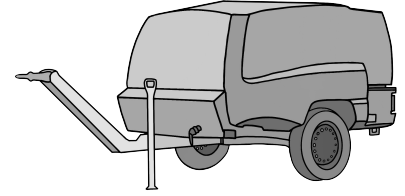

Compressors
Attachment
Ram

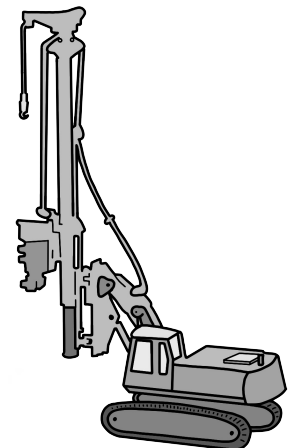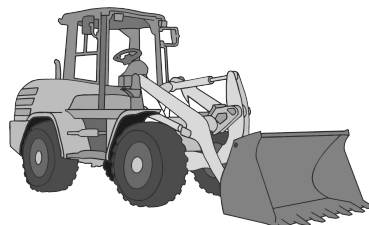

Theft Protection, Position, Usage time


- Current position for optimized transport and service
- Daily transmission of position* / Usage time
- Fastening in seconds by "click" (permanent magnet)
- Anti-theft protection for work area, relaxation area, times of day
- Internal battery supply. Up to 5 years term.

Installed in seconds. Can not locate.

* If mobile telephony is possible there.


Installation in 3 steps:

- Call Obserwando mobile app

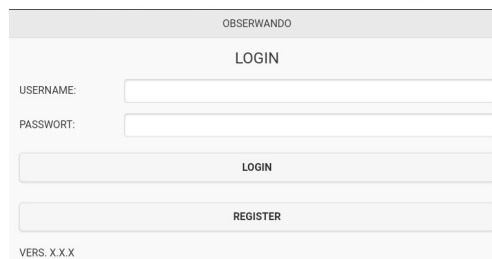

Observedando mobile app login screen. It features a 'LOGIN' button and a 'REGISTER' button. The screen also displays 'VERS. X.X.X' at the bottom.


- Enter / scan the EQTrace serial number

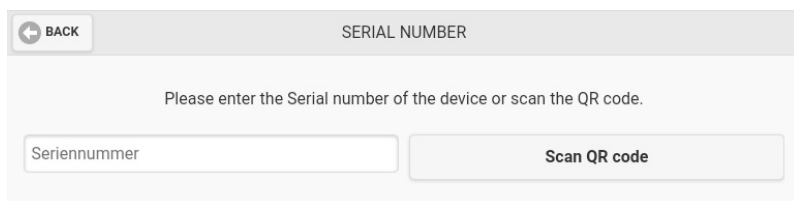

Observedando mobile app serial number entry screen. It has a 'BACK' button and a 'Scan QR code' button. The text 'Please enter the Serial number of the device or scan the QR code.' is displayed above the input field.



- Store machine / part number

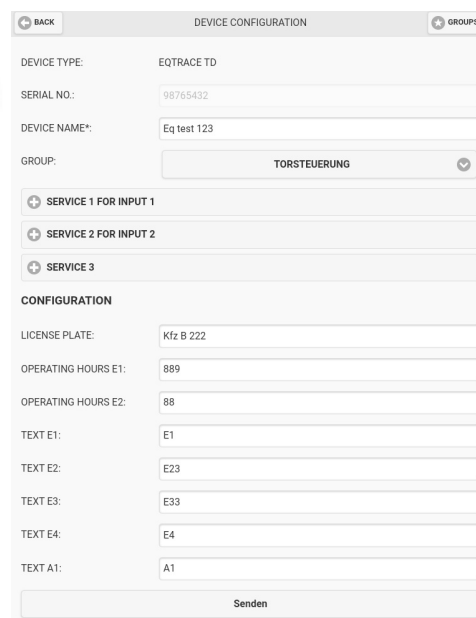

Observedando mobile app device configuration screen. It shows fields for 'DEVICE TYPE' (EQTRACE TD), 'SERIAL NO.' (98765432), 'DEVICE NAME*' (Eq test 123), and 'GROUP' (TORSTEUERUNG). There are also sections for 'SERVICE 1 FOR INPUT 1', 'SERVICE 2 FOR INPUT 2', and 'SERVICE 3'. A 'CONFIGURATION' section includes fields for 'LICENSE PLATE' (Kfz B 222), 'OPERATING HOURS E1' (889), 'OPERATING HOURS E2' (88), 'TEXT E1' (E1), 'TEXT E2' (E23), 'TEXT E3' (E33), 'TEXT E4' (E4), and 'TEXT A1' (A1). A 'Senden' button is at the bottom.

Finished. Current position and usage data are now passed to Obserwando every day.

Technical Data:

Operating voltage: Supply via built-in battery

Protection: IP68

Temperature range: +70°C / -20°C

Housing dimensions: L*B*H (mm) = 112 * 68 * 19,2

Do you have any questions? Call us, we are happy to help.



Rösler Software-Technik GmbH, Steinheide 36, 28857 Syke-Heiligenfelde, Germany

Tel: +49 (0)421 4899399-0, Fax +49 (0)421 4899399-96, www.miniDaT.de, email: info@miniDaT.de